


Algorithms (600-699)

Not Available With DIN Plug Enable

HW Sticker	KW	Alg	Cells	V4	Sel	Ah	I2	I3
V A								

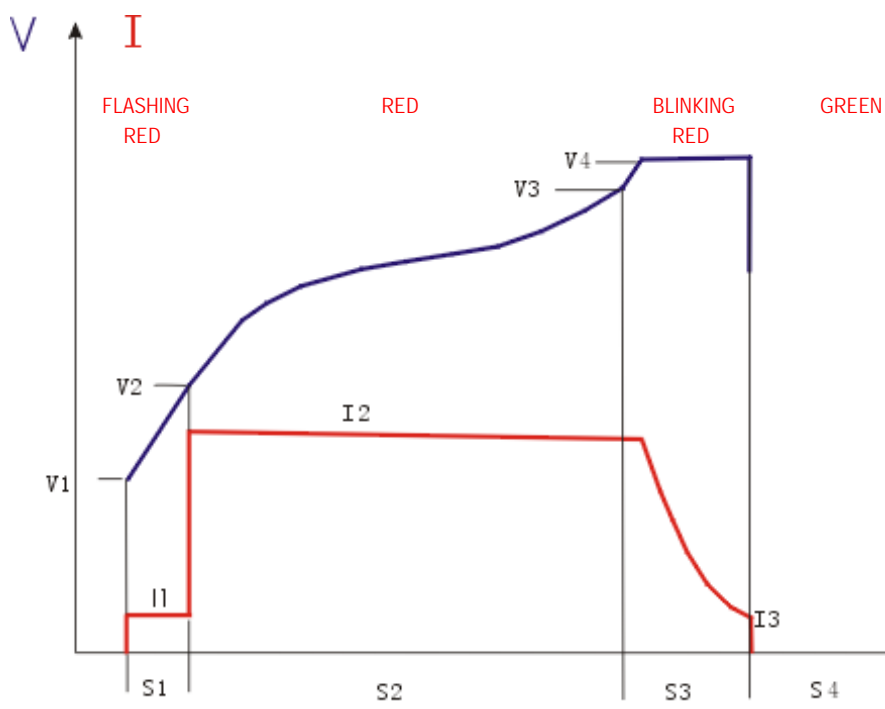

Algorithms	605	606	611	612	616	617 MM	689 L	699 T
V1	2.00v						0.65v	0.30v
V2	2.80v					3.20v	0.80v	0.80v
V3						4.12v	1.43v	
V4	4.00v	4.10v	3.65v	3.65v	3.80v	4.13v	1.45v	1.43v
I1	AH /30					AH /20	AH /28	AH /3.5
I2 max	AH /2	AH /2	AH /2	AH /2	AH /4	AH /1	AH /28	AH /1.5
I3	AH /40	AH /50	AH /80	AH /180	AH /120	AH /20	AH /56	AH /7
T_S1_max	4 h						8 h	2 h
T_S2_max	24 h	24 h	30 h	30 h	50 h	4 h	30 h	2 h
AH_S2_max	AH*2.0					AH*1.0	AH*2.0	AH*2.0
T_S3_max	4 h	4 h	4 h	8 h	4 h	2 h	4 h	1 h
AH_S3_max	AH*0.3							AH*0.2
S4_restart_vol	NOP							

115 VAC POWER:	
230 VAC POWER:	